



F3 CL FRIDGE . CANTILEVER TAIL-LIFT WITH INSULATED PLATFORM (PATENTED) - 5 CYLINDERS

LOAD CAPACITY

- 1500 KG
- 2000 KG



K less than 0,4 (W/m² K)



APPLICATIONS

Anteo tail-lift, Fridge series, for insulated vans without rear doors:


Less weight, more useful capacity on the vehicle, faster unloading, and therefore more profit.

Weight of only 505 Kg for 1.500 Kg capacity at 600 mm.

An integrated structure consisting of aluminium and synthetic material gives to the tail-lift Fridge strength and lightness. (Patented)

TECHNICAL SPECIFICATIONS

Seals kit:	As Standard
Cylinders:	2 lift cylinders + 2 tilt cylinders + 1 automatic tilt cylinder
Tilt cylinders:	Double acting
Platform opening:	Powered opening
Automatic tilt at ground level:	Yes, Hydraulic
Platform material:	Aluminium and synthetic
Platform overlap under floor:	-55 mm
Standard platform depths Alu:	1958 - 2195 - 2340 mm
Standard platform widths Alu:	On demand (max 2600)
Lift arm lengths:	H - HS - HL
Lift arm widths (W):	1230
Standard control:	Unit Exterior control box with joystick, turn button
Weights incl. CE bumper	

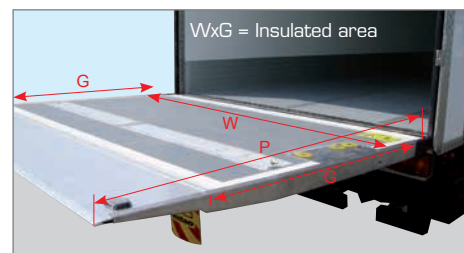

Mod.	Load capacity (centre of gravity at 600 mm)	Weight * Kg	E	A		B	B'	T	Platform dimensions		
			max	min	max	min	min		W	P	G
F3 CL FRIDGE 15 C	1500 Kg	505	1150	290	520	562	684	254	2600 Max	1958 2195 2340	1451 1688 1833
F3 CL FRIDGE 15 H		520	1320	350	600	626	735	254			
F3 CL FRIDGE 15 HS		535	1550	420	700	744	866	254			
F3 CL FRIDGE 15 HL		550	1700	540	820	827	949	254			
F3 CL FRIDGE 20 C	2000 Kg	515	1150	290	520	562	684	254	2600 Max	1958 2195 2340	1451 1688 1833
F3 CL FRIDGE 20 H		530	1320	350	600	626	735	254			
F3 CL FRIDGE 20 HS		545	1550	420	700	744	866	254			
F3 CL FRIDGE 20 HL		460	1700	540	820	827	949	254			

*Approximate weight for tail-lift equipped with aluminium platform dimensions 1600 x 2500 mm.

Centre of gravity of the vehicle depending on the type of arm and the size of the installations on the vehicle (see assembly instructions).

The above mentioned weights are approximate and may vary according to production. Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight.