

NEW

F3 RE 20 AIR CMC (COMPACT) . RETRACTABLE TAIL-LIFT CHROMED GUIDES - 5 CYLINDERS

LOAD CAPACITY
• 2000 KG

SPECIALS
AIRPORT
CATERING



APPLICATIONS


The tail-lift is stowed away under the vehicle making it ideal for dock loading.

F3RE 20 AIR CMC COMPACT is suggested and especially designed for rigid vehicles with very short overhang and very high distance from body floor to the ground.


The retractable tail-lift F3RE 20 AIR CMC COMPACT is the ideal tail-lift for airport catering.

TECHNICAL SPECIFICATIONS

Cylinders:	2 lift cylinders + 2 tilt cylinders + 1 automatic tilt cylinder
Sliding system:	Chromed Guides with hydraulic motor + rack and pinion drive
Tilt cylinders:	Single acting
Automatic tilt at ground level:	Yes, Hydraulic
Platform material:	Aluminium
Standard platform depths Alu:	2 folds 1600
Standard platform widths Alu:	2100 - 2250 - 2400 mm (Max 2500)
Lift arm lengths:	HL 1040 mm
Lift arm widths (W):	1230 mm
Standard control:	Unit Exterior control box with joystick, turn button

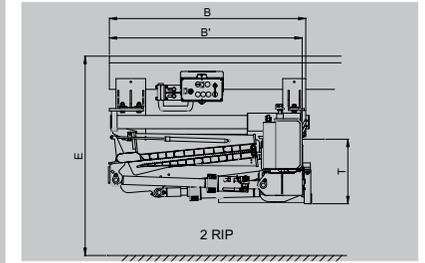

Side fitting for rigid vehicle - 2 folds platform

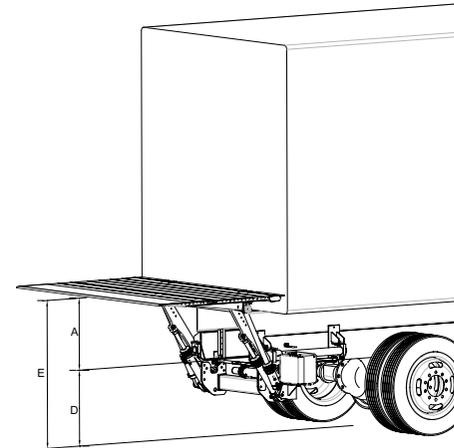

2 FOLDS PLATFORM

Mod.	Load Capacity (centre of gravity at 600 mm)	E max	Platform Depth (example)	A max	D max	B min	B' min	T	Weight ** (Kg)
F3 RE 20 HL AIR	2000 Kg	1690	1583 (850 + 733)	800	890	1295	1295	345	640

** Approximate weight for tail-lift with platform width 2450 mm.

Centre of gravity of the vehicle depending on the type of arm and the size of the installations on the vehicle (see assembly instructions). The above mentioned weights are approximate and may vary according to production. Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight.

