

F3 HD IVF INTERNAL TAIL-LIFT - FOLDING PLATFORM VERSION FOR VAN DERIVED CONVERSIONS - 2 CYLINDERS

LOAD CAPACITY
• 350 KG



APPLICATIONS

The F3HD-IVF tail-lift has been designed for van derived vehicles, especially:

| | |
|---------------|-------------|
| Citroen | JUMPER |
| Citroen | RELAY |
| Fiat | DUCATO |
| Ford | TOURNEO |
| Ford | TRANSIT |
| Iveco | DAILY |
| Mercedes Benz | SPRINTER |
| Nissan | INTERSTAR |
| Nissan | PRIMASTAR |
| Opel | MOVANO |
| Opel | VIVARO |
| Peugeot | BOXER COMBI |
| Renault | MASTER |
| Renault | TRAFIC |
| Volkswagen | CRAFTER |

- In order to avoid that sudden size changes from the vehicle manufacturers do not allow the tail-lift installation, we recommend checking the available space on the vehicle as regards to the overall dimensions of the tail-lift.



TECHNICAL DATA

| | F3HD 1150 IVF | F3HD * 800X1400 IVF | F3HD 900X1400 IVF |
|----|------------------|------------------------|----------------------|
| E | 920 | 920 | 920 |
| B | 310 | 310 | 310 |
| B1 | 350 | 350 | 350 |
| V | 1150 | 1400 | 1400 |
| H | 700 | 800 | 800 |
| L | 800 | 800 | 900 |
| W | 1030 | 1030 | 1130 |
| W1 | 1140 | 1140 | 1240 |
| Z | 1220 | 1220 | 1220 |

| | | | F3HD 1150 IVF | F3HD* 800X1400 IVF | F3HD 900X1400 IVF |
|-------------------------------|------|-------|------------------|-----------------------|----------------------|
| Max load capacity | | Kg | 350 | 350 | 350 |
| Weight | | Kg | 145 | 145 | 155 |
| Max power consumption | 12 V | Amp | 100 | 100 | 100 |
| | 24 V | Amp | 50 | 50 | 50 |
| Up-stroke speed (full load) | | M/min | 5 | 5 | 5 |
| Down-stroke speed (full load) | | M/min | 6 | 6 | 6 |
| Oil tank capacity | | L | 1,8 | 1,8 | 1,8 |
| Electric motor power | 12 V | Watt | 500 | 500 | 500 |
| | 24 V | Watt | 800 | 800 | 800 |
| Working pressure | | Bar | 140 | 140 | 140 |
| Noise level [**] | | Db | <70 | <70 | <70 |

** Equivalent continuous (A) weighted noise pressure level, in the working place.

The above mentioned components are indicative and may vary as regards to the performance. Anteo reserves the right to change the weight and the technical specifications without prior notice. No indemnity for damages may be claimed from anteo for technical specification and weight changes or for installation problems due to lack of space on the following vehicles.

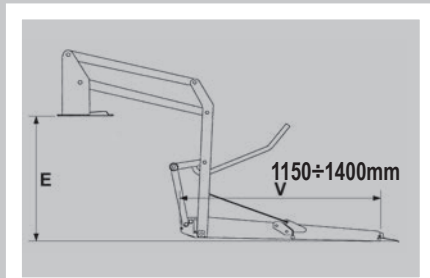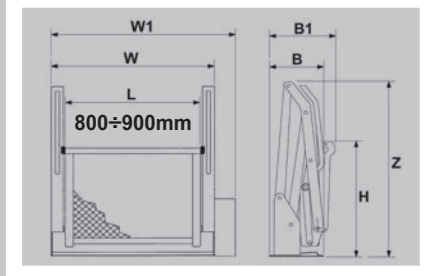

ACCESS
LIFTS FOR
DISABLED
PERSON