



F3 HD RE . UNDER CHASSIS RETRACTABLE TAIL-LIFT - 2 CYLINDERS

LOAD CAPACITY
• 320 KG



Toe protection bar with micro-switched operation cut-out



APPLICATIONS

The F3HD-RE tail-lift has been designed for van derived vehicles, especially:



| | |
|---------------|---------------------------------------------------------|
| Citroen | JUMPER |
| Citroen | RELAY |
| Fiat | DUCATO |
| Ford | TRANSIT |
| Iveco | DAILY |
| Mercedes Benz | SPRINTER |
| Nissan | INTERSTAR |
| Opel | MOVANO |
| Peugeot | BOXER |
| Renault | MASTER |
| Volkswagen | CRAFTER |
| Volkswagen T5 | (it requires light modifications to the exhaust system) |

- In order to avoid that sudden size changes from the vehicle manufacturers do not allow the tail-lift installation, we recommend checking the available space on the vehicle as regards to the overall dimensions of the tail-lift.

TECHNICAL SPECIFICATIONS

| | | F3HD 1100 RE | F3HD 1200 RE |
|-------------------------------|-----------|--------------|--------------|
| Max load capacity | Kg | 320 | 320 |
| Weight | Kg | 140 | 145 |
| Max power consumption | 12 V Amp | 100 | 100 |
| | 24 V Amp | 50 | 50 |
| Up-stroke speed (full load) | m/min | 5 | 5 |
| Down-stroke speed (full load) | m/min | 6 | 6 |
| Oil tank capacity | l | 1,8 | 1,8 |
| Electric motor power | 12 V Watt | 500 | 500 |
| | 24 V Watt | 800 | 800 |
| Working pressure | bar | 140 | 140 |
| Noise level (**) | dB | <70 | <70 |

TECHNICAL DATA

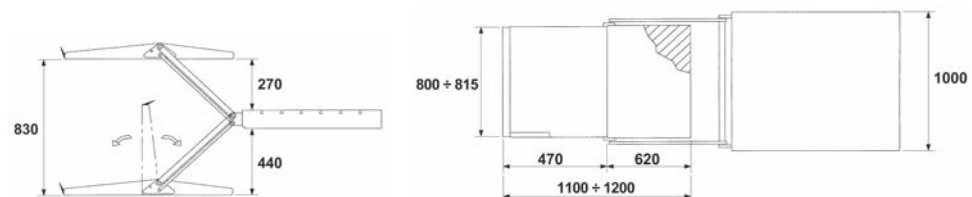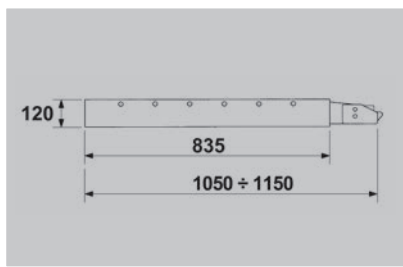

SAFETY DEVICES

- Battery disconnect device with key main switch
- Emergency mechanical hand pump
- Toe protection bar with micro-switched operation cut-out
- Automatic safety flap for wheelchair locking and tilting to the ground

** Equivalent continuous (A) weighted noise pressure level, in the working place.

The above mentioned components are indicative and may vary as regards to the performance. Anteo reserves the right to change the weight and the technical specifications without prior notice. No indemnity for damages may be claimed from anteo for technical specification and weight changes or for installation problems due to lack of space on the following vehicles.