



F3 HD RE . UNDER CHASSIS RETRACTABLE TAIL-LIFT - 2 CYLINDERS

LOAD CAPACITY
• 320 KG



Toe protection bar with micro-switched operation cut-out



APPLICATIONS

The F3HD-RE tail-lift has been designed for van derived vehicles, especially:



Citroen	JUMPER
Citroen	RELAY
Fiat	DUCATO
Ford	TRANSIT
Iveco	DAILY
Mercedes Benz	SPRINTER
Nissan	INTERSTAR
Opel	MOVANO
Peugeot	BOXER
Renault	MASTER
Volkswagen	CRAFTER
Volkswagen T5	(it requires light modifications to the exhaust system)

- In order to avoid that sudden size changes from the vehicle manufacturers do not allow the tail-lift installation, we recommend checking the available space on the vehicle as regards to the overall dimensions of the tail-lift.

TECHNICAL SPECIFICATIONS

		F3HD 1100 RE	F3HD 1200 RE
Max load capacity	Kg	320	320
Weight	Kg	140	145
Max power consumption	12 V Amp	100	100
	24 V Amp	50	50
Up-stroke speed (full load)	m/min	5	5
Down-stroke speed (full load)	m/min	6	6
Oil tank capacity	l	1,8	1,8
Electric motor power	12 V Watt	500	500
	24 V Watt	800	800
Working pressure	bar	140	140
Noise level (**)	dB	<70	<70

TECHNICAL DATA

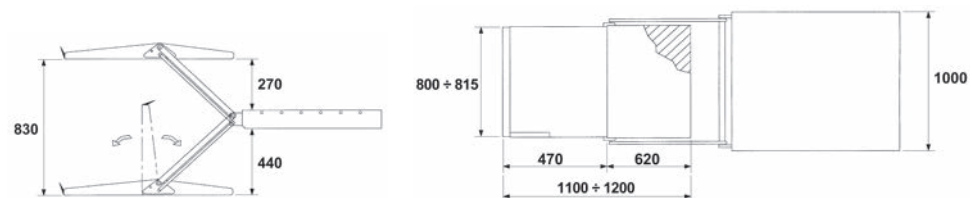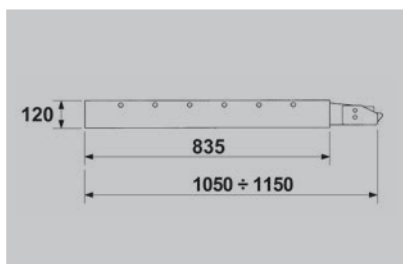

SAFETY DEVICES

- Battery disconnect device with key main switch
- Emergency mechanical hand pump
- Toe protection bar with micro-switched operation cut-out
- Automatic safety flap for wheelchair locking and tilting to the ground

** Equivalent continuous (A) weighted noise pressure level, in the working place.

The above mentioned components are indicative and may vary as regards to the performance. Anteo reserves the right to change the weight and the technical specifications without prior notice. No indemnity for damages may be claimed from anteo for technical specification and weight changes or for installation problems due to lack of space on the following vehicles.