

PK 41002 EH


PALFINGER

LIFETIME EXCELLENCE



**ROBUST HEAVY DUTY CRANE TECHNO-
LOGY AND MODERN ELECTRONICS ARE
GUARANTORS FOR LONG-LIFE CYCLE.**



E

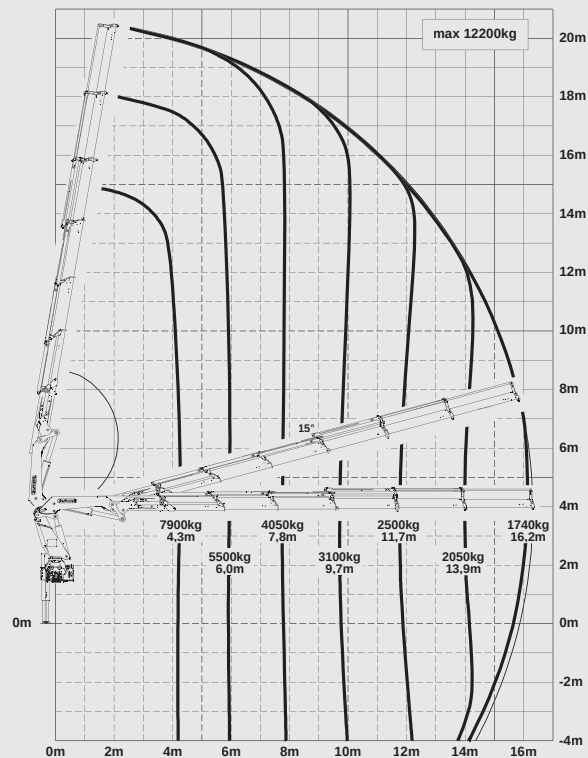


DIMENSIONS

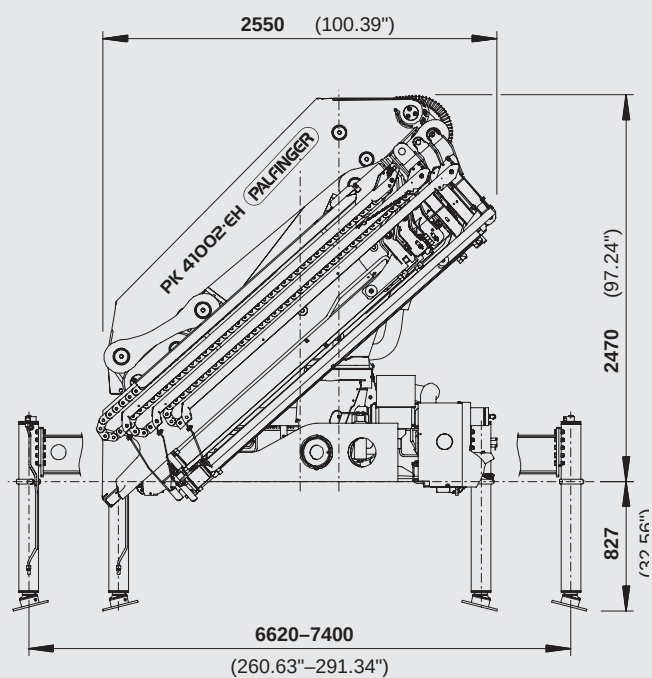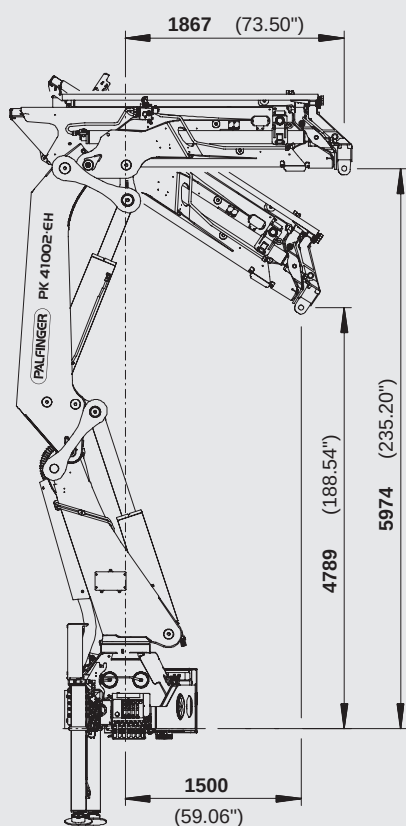



- High value retention due to KTL coating
- Additional applications due to Power Link Plus
- Maximum utilisation of the working range due to HPSC
- More variety due to Fly-Jib

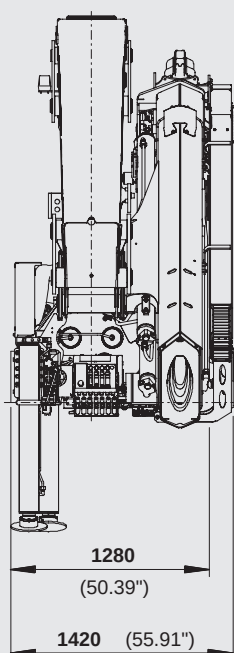

TECHNICAL SPECIFICATIONS (EN 12999 HC1 HD4/B3)

Max. lifting moment	38.4 mt/376.7 kNm	277820 ft.lbs
Max. lifting capacity	14600 kg/143.2 kN	32190 lbs
Max. hydraulic outreach	16.3 m	53' 6"
Max. manual outreach	23.3 m	76' 5"
Max. outreach (with fly jib)	30.2 m	99' 1"
Slewing angle	400°	
Slewing torque	4.0 mt/39.2 kNm	28940 ft.lbs
Stabilizer spread	std. 6.6 m/21' 8"	max. 7.4 m/24' 3"
Fitting space required (std.)	1.28 m	4' 2"
Width folded	2.55	8' 4"
Max. operating pressure	350 bar	5075 psi
Recommended pump capacity	from 80 l/min to 100 l/min	21.1 US gal./min 26.4 US gal./min
Dead weight (std.)	3800 kg	8380 lbs



* Optional features / country-specific equipment

PALFINGER LOADER CRANES ARE CONVINCING DUE TO THEIR SUPERIOR LIFE-CYCLE PERFORMANCE. THEY ARE THE MOST ECONOMICAL AND ALSO THE MOST RELIABLE OVER THE ENTIRE PRODUCT LIFE. FROM SOLUTION FINDING TO RESALE.

➤ **BETTER SOLUTIONS**

➤ **HIGHER VALUE RETENTION**

➤ **BETTER EFFICIENCY**

➤ **BETTER ECOLOGY**



➤ **BETTER ERGONOMICS**

LIFETIME EXCELLENCE

➤ **HIGHER SERVICEABILITY**

➤ **HIGHER AVAILABILITY**

➤ **MORE RELIABILITY**

For further information please visit: www.palfinger.com/thebrand