



STANDARD EQUIPMENT

- 220V/380V power supply to the cage
- Auto levelling basket
- Auto-jacking/turntable levelling function
- Cage hook (max 300 kg / 660 lbs)
- Cage multifunction pin
- Cage rotation
- Dead man pedal both on the cage and on turntable controls
- Double telescopic extension booms
- Fully electronic proportional hydraulic controls driven by canBUS system
- Hands free intercom system ground/cage
- Memory function
- One click auto-closing function
- Remote management and diagnostic software
- Smooth movements, no flapping with brakes and ramps
- Variable outreach management
- Water sprinkler for cage protection

STANDARD COMPLIANCE

- UNI EN 1777
- UNI EN 1846
- CE (european certification)



DT TRUCK 72F


PERFORMANCES

	metric	US
Working height	22 m	72 ft 2 in
Horizontal outreach	14 m	45 ft 11 in
Up and over clearance	10 m	32 ft 10 in
Downreach	- 5 m	- 16 ft 5 in
Lift capacity	300 kg	660 lbs
Minimum GVW	5 T	11023 lbs
Water capacity	700 to 1000 l/min	180 to 260 GPM (US liquid)
Operating wind speed	12,5 m/s	71 fps

MEASUREMENTS

	metric	US
Foldable front platform	1150x250 mm	3 ft 9 in x 10 ft
A Rescue cage size	1800x830x1180 mm	5 ft 11 in x 2 ft 7 in x 3 ft 11 in
B Height*	2470 mm	8 ft 1 in
C₁ Length* basket off	7050 mm	23 ft 2 in
C Length*	7880 mm	25 ft 10 in
D₁ Width* outriggers in	2230 mm	7 ft 4 in
D Width* outriggers out	3780 mm	12 ft 5 in
E Departure angle* (minimum)	12°	22%

* Depending on chassis

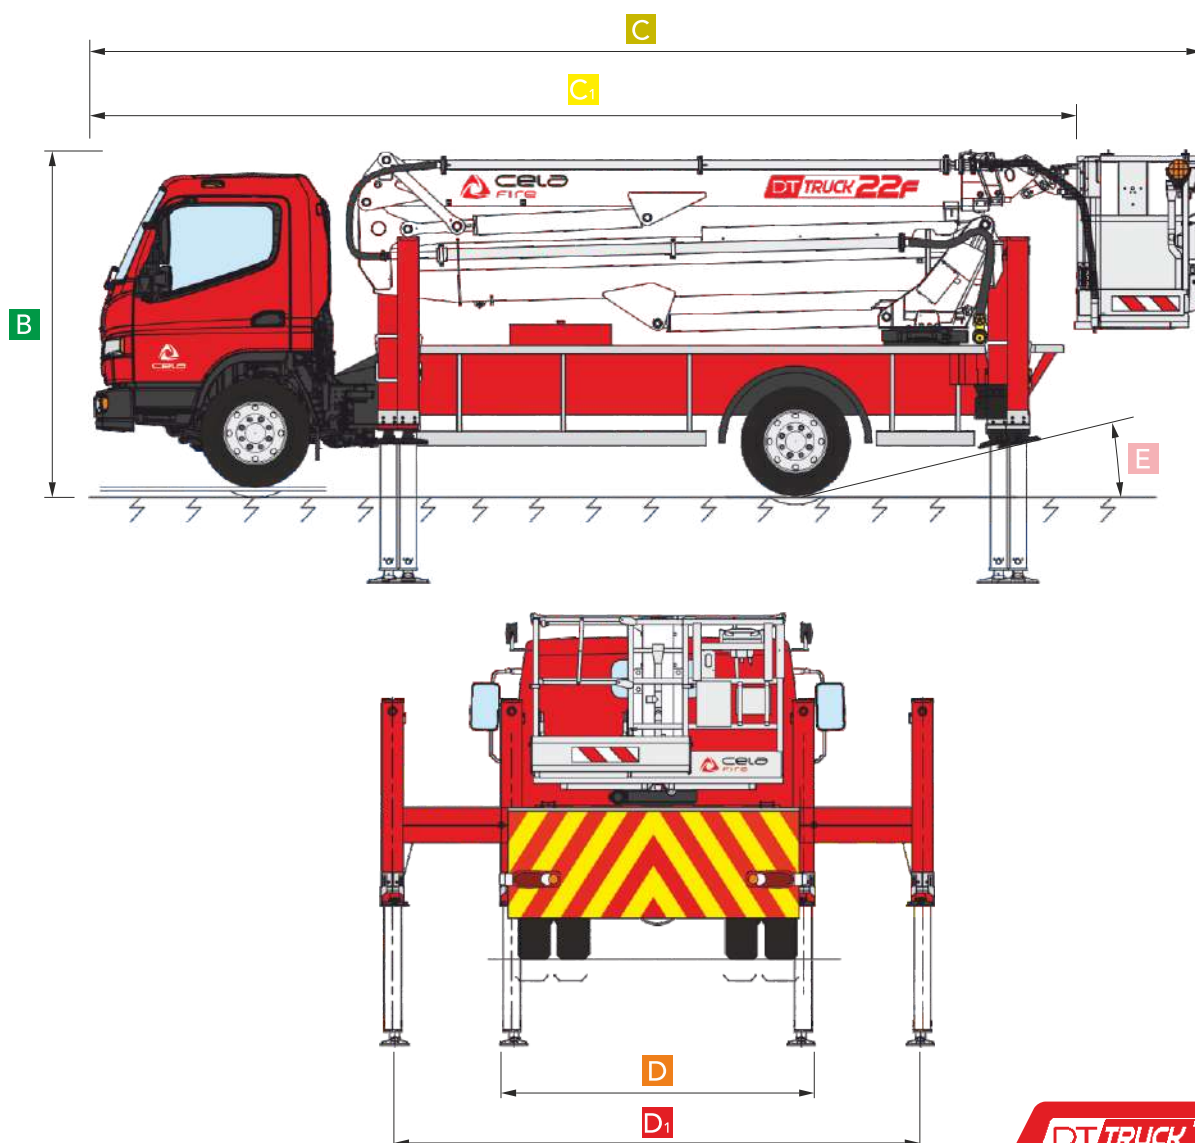

360° CONTINUOUS

