

DT TRUCK 28F



DT TRUCK 92F

STANDARD EQUIPMENT

- 220V/380V power supply to the cage
- Auto levelling basket
- Auto-jacking/turntable levelling function
- Cage hook (max 300 kg / 660 lbs)
- Cage multifunction pin
- Cage rotation
- Dead man pedal both on the cage and on turntable controls
- Double telescopic extension booms
- Fully electronic proportional hydraulic controls driven by canBUS system
- Hands free intercom system ground/cage
- Memory function
- One click auto-closing function
- Remote management and diagnostic software
- Smooth movements, no flapping with brakes and ramps
- Variable outreach management
- Water sprinkler for cage protection

STANDARD COMPLIANCE

- UNI EN 1777
- UNI EN 1846
- CE (european certification)




PERFORMANCES

	metric	US
Working height	28 m	91 ft 10 in
Horizontal outreach	14 m	45 ft 11 in
Up and over clearance	16 m	52 ft 6 in
Downreach	- 5,5 m	- 18 ft
 Lift capacity	300 kg	660 lbs
 Minimum GVW	10 T	22046 lbs
 Water capacity	700 to 1100 l/min	180 to 260 GPM (US liquid)
 Operating wind speed	12,5 m/s	71 fps

MEASUREMENTS

	metric	US
Foldable front platform	1150x250 mm	3 ft 9 in x 10 in
 Rescue cage size	1800x830x1180 mm	5 ft 11 in x 2 ft 7 in x 3 ft 11 in
 Height*	2750 mm	9 ft
 Length* basket off	7260 mm	23 ft 10 in
 Length*	8090 mm	26 ft 6 in
 Width*	2500 mm	8 ft 2 in
 Departure angle* (minimum)	12°	22%

* Depending on chassis

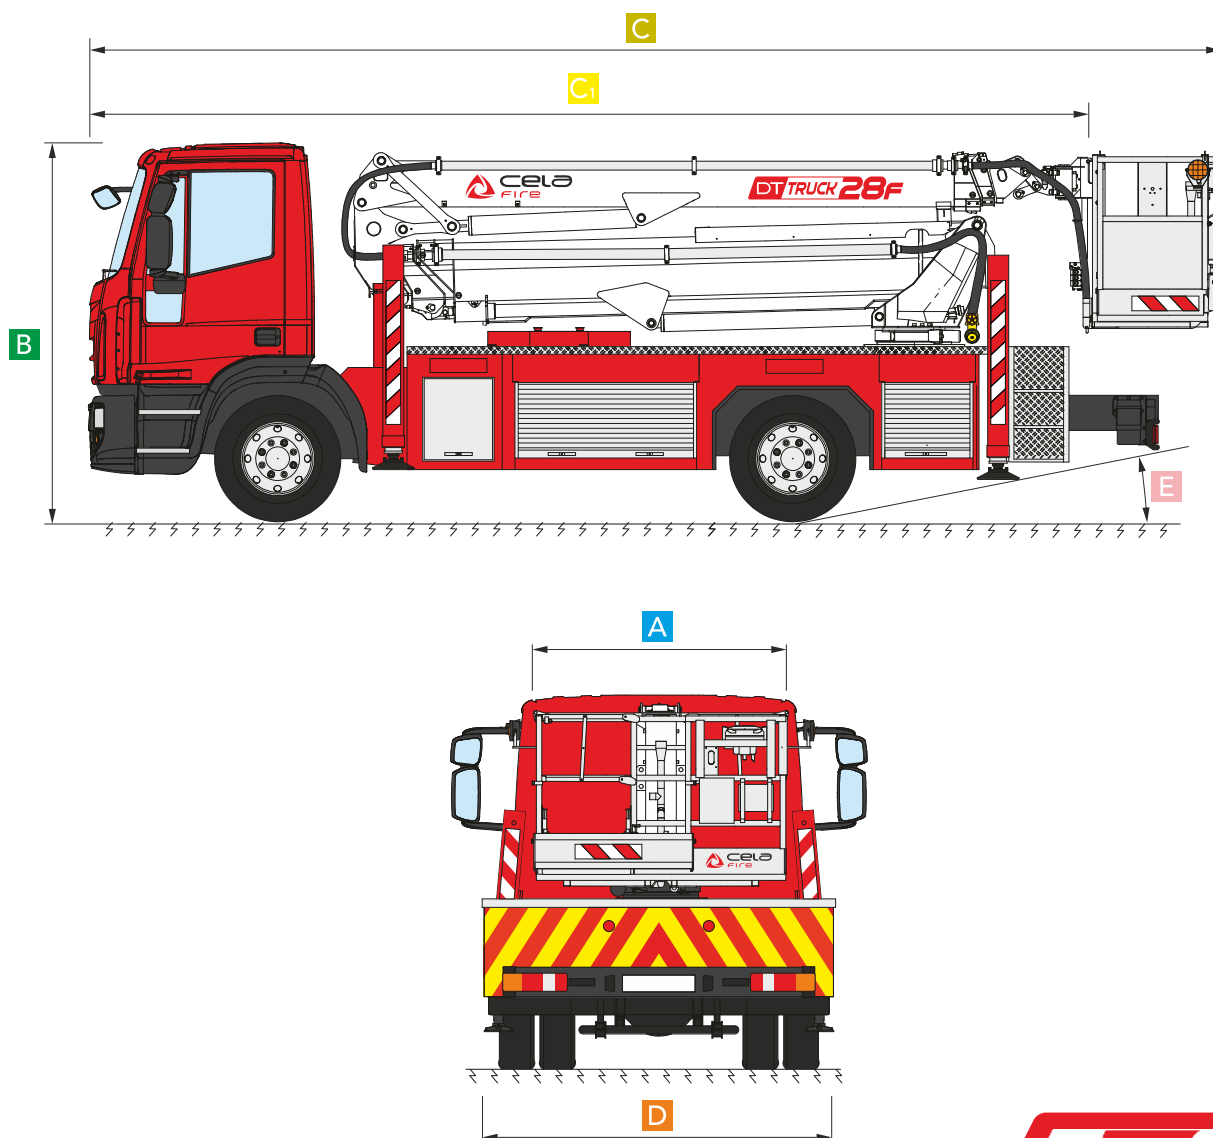

360° CONTINUOUS

