PK 19502 / 22002 EH


PALFINGER
LIFETIME EXCELLENCE

ITS COMPACT DIMENSIONS AND LOW DEAD WEIGHT ALLOWS AN OPTIMISED MOUNTING CONCEPT



PK 22002 EH
HIGH PERFORMANCE

D

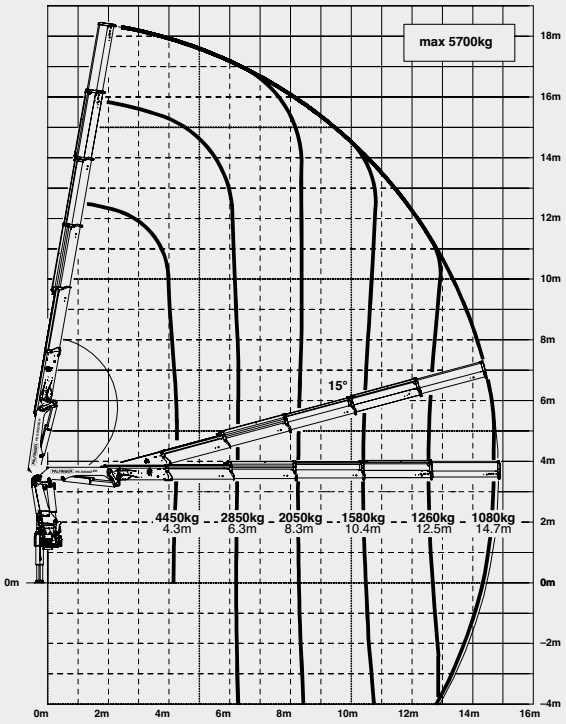

The outreaches stated are with a boom angle of 20° and are therefore not the maximum.

POWER LINK PLUS
AS STANDARD

LIFTING CAPACITIES




D


max.		5700 kg	12560 lbs
4.3 m	14' 1"	4450 kg	9800 lbs
6.3 m	20' 8"	2850 kg	6300 lbs
8.3 m	27' 3"	2050 kg	4550 lbs
10.4 m	34' 1"	1580 kg	3450 lbs
12.5 m	41' 0"	1260 kg	2800 lbs
14.7 m	48' 3"	1080 kg	2350 lbs
16.9 m*	55' 5"	890 kg	1960 lbs
18.9 m*	62' 0"	620 kg	1380 lbs


*mechanical extension


PERFECT DIMENSIONS

EXTENSION BOOM VARIATIONS

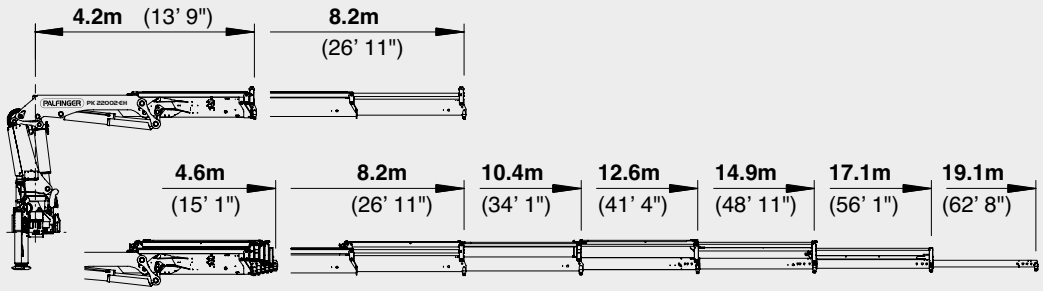


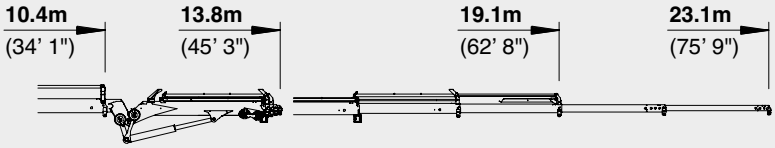


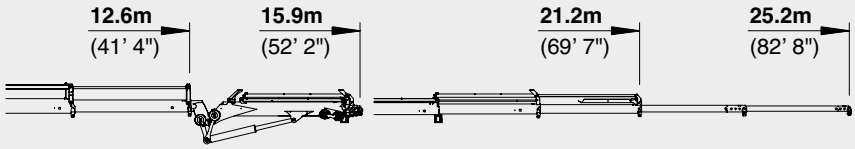

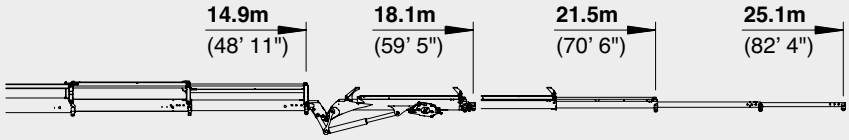

DIMENSIONS

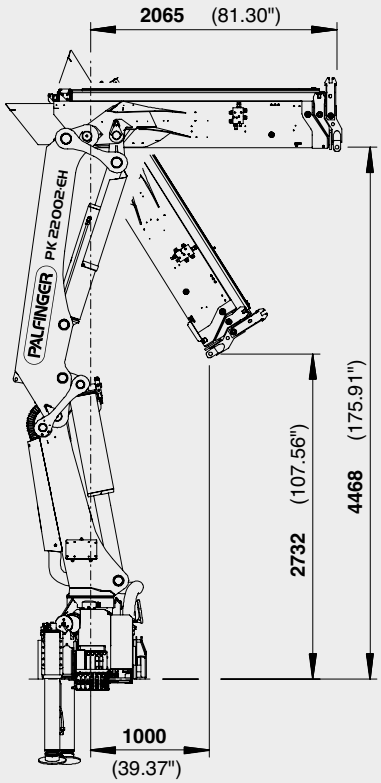

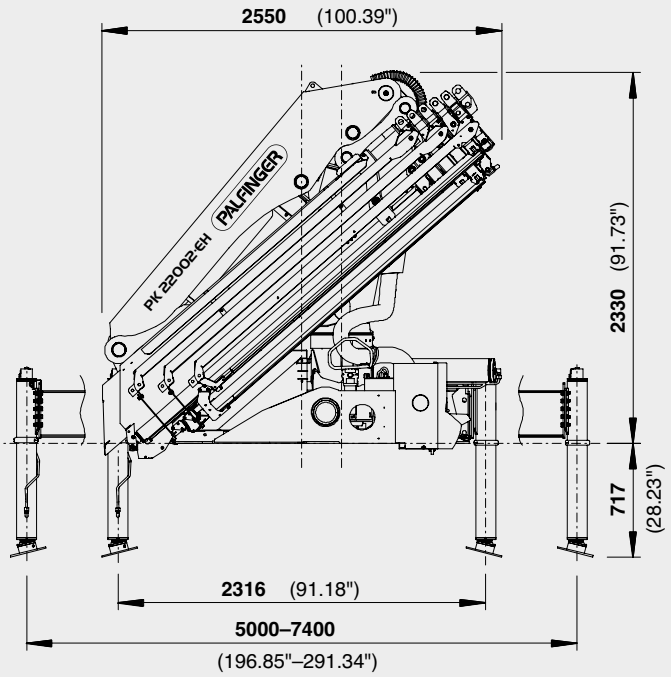

PK 22002 EH

B PJ060B JV2

C PJ060B JV2


D PJ040A JV2

TECHNICAL SPECIFICATIONS (EN 12999 HC1 HD4/B3)

Max. lifting moment	20.9 mt/205.0 kNm	151190 ft.lbs
Max. lifting capacity	6100 kg/59.8 kN	13440 lbs
Max. hydraulic outreach	17.1 m	56' 1"
Max. manual outreach	19.1 m	62' 8"
max. outreach (with fly-jib)	25.2	82' 8"
Slewing angle	400°	
Slewing torque	2.3 mt/22.6 kNm	16640 ft.lbs
Stabiliser spread (std./max.)	5.0 m / 7.4 m	16' 5" / 24' 3"
Fitting space required (std.)	0.91 m	2' 12"
Width folded	2.55 m	8' 4"
Max. operating pressure	350 bar	5075 psi
Recommended pump capacity	from 65 l/min	17.2 US gal./min
	to 90 l/min	23.8 US gal./min
Dead weight (std.)	2391 kg	5270 lbs

PACKAGE MODEL

- E-HPLS
- Paltronic 50
- Radio remote control with LED display
- Danfoss control valve or PVG2000
- 8.5 kW oil cooler
- 200 l oil tank

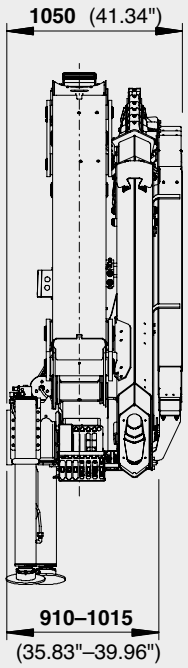

PALFINGER

WWW.PALFINGER.COM



Cranes shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed.
Dimensions may vary. Subject to technical changes, errors and translation mistakes.

KP-H19/22002EM2+E/E 12 /13, K 12 /14, D 11 /14