

F3MH 075 - F3MHX 075 . HALF LIFT

2 CYLINDERS

LOAD CAPACITY

- 750 KG



CANTILEVER LIFTS



APPLICATIONS

The 2-cylinder F3MH075 - F3MHX075 - with Half platform are light compact lifts with high simplicity, low maintenance cost and attractive pricing ideal to equip rental vehicles and light duty commercial vehicles.



These half platforms keep one of the rear doors of the vehicle body free, offering quick and unobstructed access to the cargo space at all times.

The F3MH075 and F3MHX 075 suit most commercial vehicles and light trucks up to 7.5T GVW.


TECHNICAL SPECIFICATIONS

Cylinders:	1lift cylinder + 1tilt cylinder
Tilt cylinders:	Single acting
Platform opening:	Springs and gravity
Automatic tilt at ground level:	Yes, mechanical
Platform material:	Aluminium
Platform overlap under floor:	-50mm
Standard platform depths Steel:	Not available
Standard platform depths Alu:	1400-1600 mm (max. 1800 mm)
Standard platform widths Alu:	On demand
Lift arm lengths:	C- H
Lift arm widths (W):	570 mm
Standard control:	Unit exterior control box with joystick, turn button

Weights incl. CE bumper

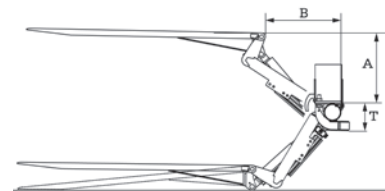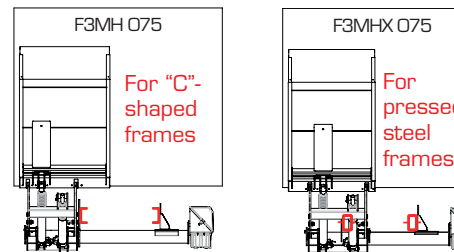

Mod.	Load capacity (center of gravity at 600 mm)	Standard Platform Dimensions		Weight* Kg	A		E	B	T
		Depth	Width		min.	max.	max.	min.	
F3MH 075 C	750 Kg	1200	on demand	160	260	470	1055	505	186
		1400*		175					
F3MH 075 H		1600		190	580				
	1800	205							

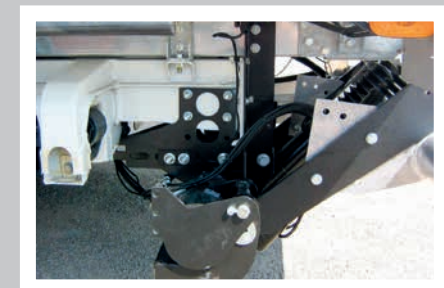

*Indicative weight of tail-lift supplied in kit without rear bumper and with a 1400 mm depth platform. The weight may vary according to width. Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight.